



LX-301 CONTROL MODULE
SHIPPED SEPARATELY

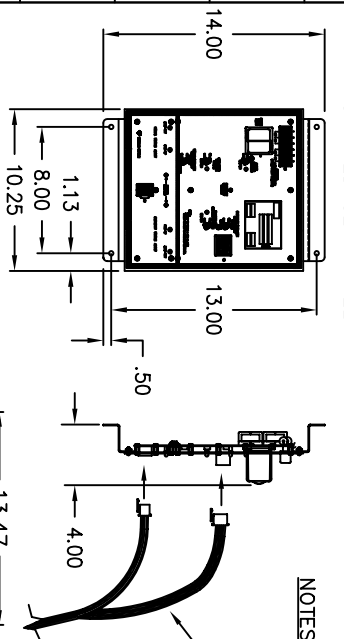

TRANSFER SWITCH 800 AMP 3 POLE OPEN PANEL

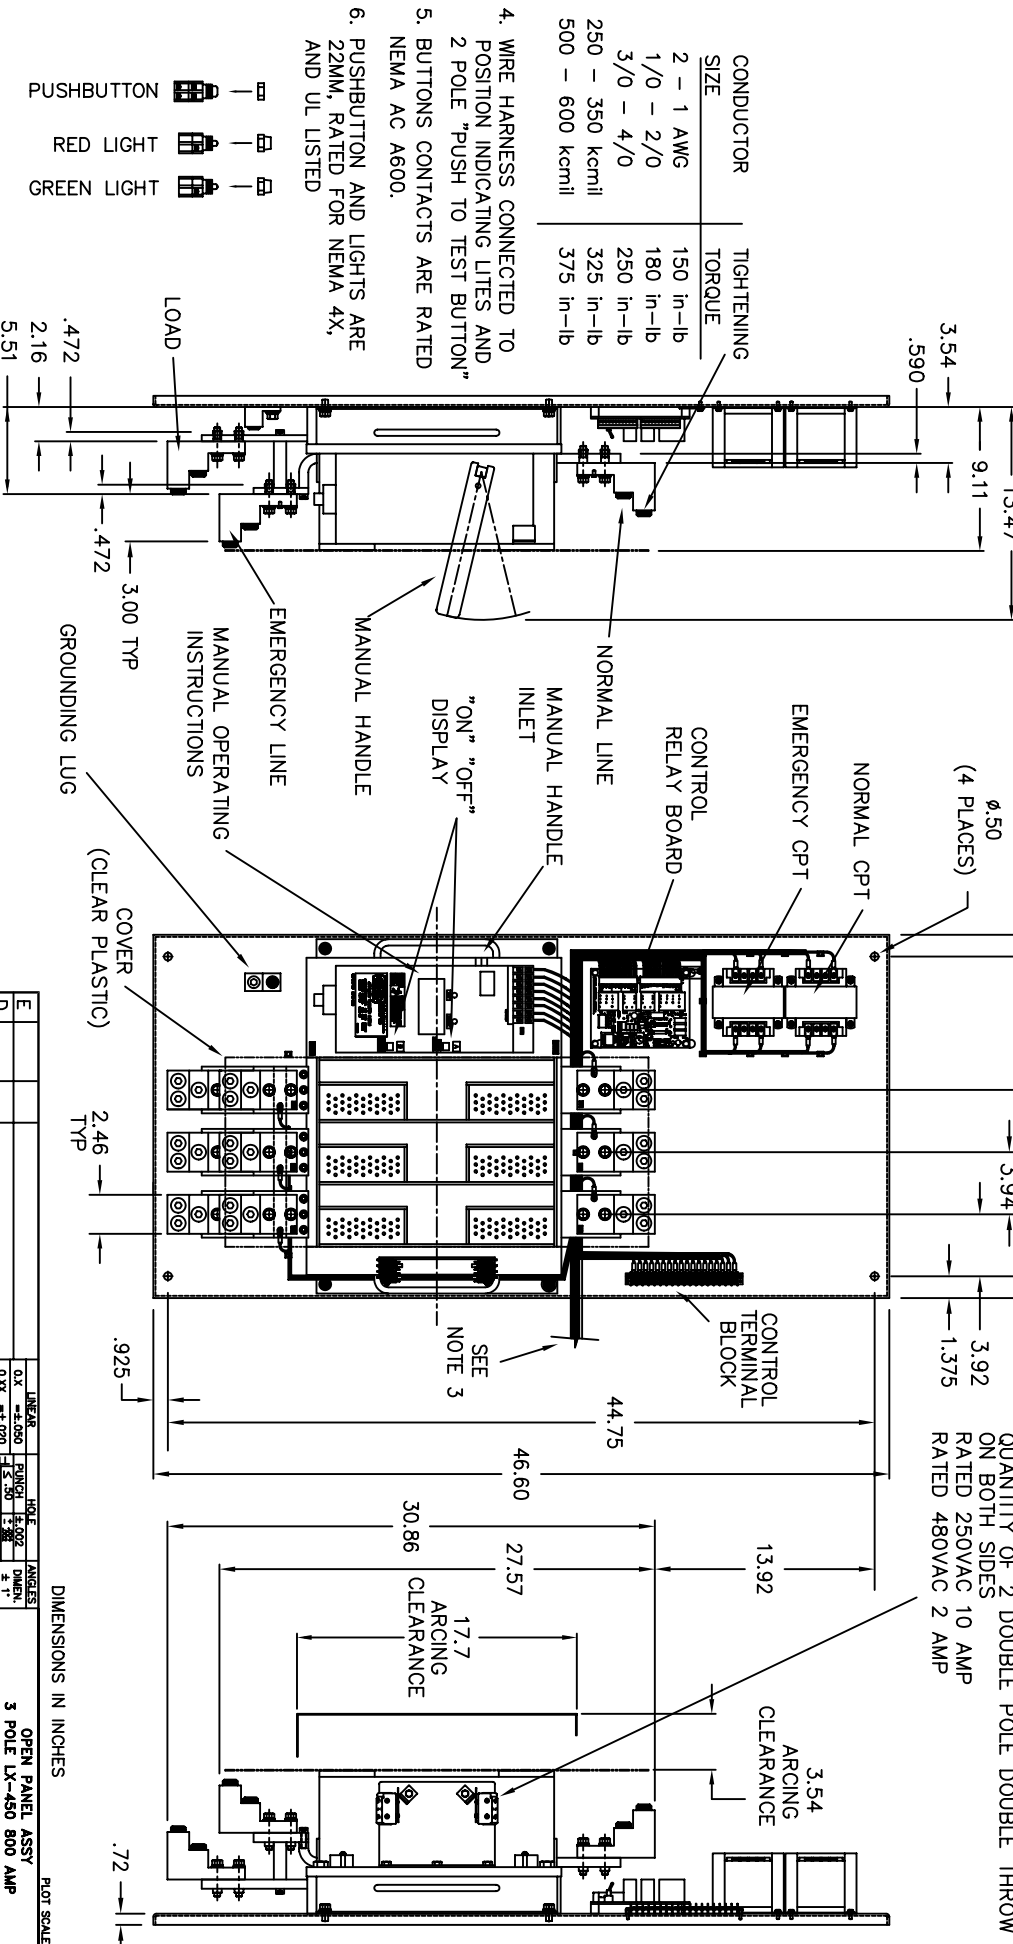

- NOTES:
1. WIRE TERMINALS AL OR CU 3 OF #2 TO 600 KCMIL
 2. TRANSFER SWITCH IS SUPPLIED WITH 4 DOUBLE POLE DOUBLE THROW AUX CONTACTS PER SIDE WITH 60 INCH LONG LEADS COMPLETE WITH TERMINATED PLUGS TO CONNECT TO LX-301, PUSHBUTTON, AND PILOT LIGHTS
 3. CONTROL WIRE HARNESS CONNECTED TO POWER PANEL

MAXIMUM RATINGS SPECIFICATIONS	
RATED VOLTAGE	480V AC
RATED CURRENT	800A
RATED FREQUENCY	50/60 HZ
POLES	3 POLES
CONNECTION TYPE	FRONT

MANUAL HANDLE & SCREWDRIVER SHIPPED WITH TRANSFER SWITCH (SHOWN AT 1.5X FOR CLARITY)

AUXILIARY SWITCHES QUANTITY OF 2 DOUBLE POLE DOUBLE THROW ON BOTH SIDES RATED 250VAC 10 AMP RATED 480VAC 2 AMP

- PUSHBUTTON
- RED LIGHT
- GREEN LIGHT

4. WIRE HARNESS CONNECTED TO POSITION INDICATING LITES AND 2 POLE "PUSH TO TEST BUTTON"
5. BUTTONS CONTACTS ARE RATED NEMA AC 8600.
6. PUSHBUTTON AND LIGHTS ARE 22MM, RATED FOR NEMA 4X, AND UL LISTED

DIMENSIONS IN INCHES

REV	DATE	BY	DESCRIPTION
A			
B			
C			
D			
E			

LINEAR	HOLE	ANGLES
0.X ±.050	FUNGI ±.002	DIMEN ±.1
0.XX ±.020	5.50 ±.005	UNIN ±.1
0.XXX ±.005	5.50 ±.005	OR ±.2

CADD NO. 46AE0801

DATE 10/12/01

DR:LMH

OK

REF.

DRG. NO. C-46AE0-801

1 OF 1

OPEN PANEL ASSY
3 POLE LX-450 800 AMP
OUTLINE DRAWING

PLOT SCALE 1=4